



COM - SCI-6 PTT CABLE  
TO USE DTR CONTROL CONNECT J1 TO PIN 4

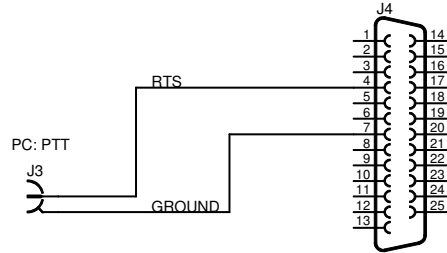

COM - SCI-6 PTT CABLE USING DB-25  
TO USE DTR CONTROL CONNECT J3 TO PIN 20

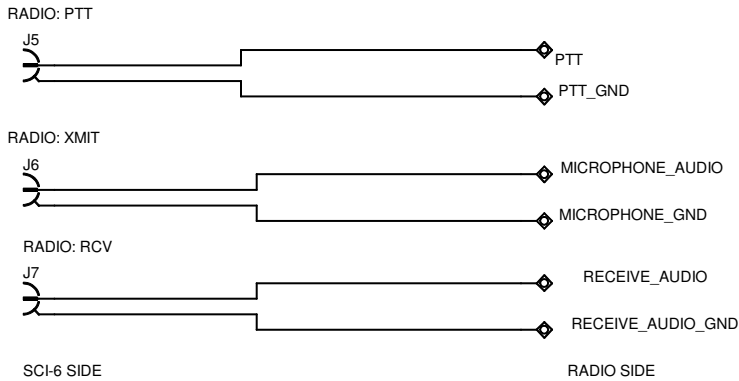

NOTES:

1. USE SHIELDED CABLE
2. DO NOT CONNECT MICROPHONE AUDIO GND TO OTHER GROUNDS
3. PTT AND MICROPHONE AUDIO WILL GO TO THE MIC CONNECTOR OR DATA INPUT CONNECTOR DEPENDING ON YOUR RADIO TYPE. CONSULT YOUR RADIO'S MANUAL.

UNIFIED MICROSYSTEMS PO BOX 133 SLINGER, WI 53086 www.unifiedmicro.com	
TITLE: SCI-6 CABLE	
Document Number:	REV: A
Date: 5/13/2006 07:56:21p	Sheet: 1/1